



'basic' bi-directional ball valve

## Solvent socket outlet - double acting spring return actuator - FPM

ITEM 678



| REFERENCE | DESCRIPTION                                      | Net weight | Volumen (m <sup>3</sup> ) | Gross weight | Unidades lote |
|-----------|--------------------------------------------------|------------|---------------------------|--------------|---------------|
| 111D650   | FPM BALL V.D/ACT.PNEUM.ACT. PLAIN 20             | 0,8623     | 0,01553                   | 1,189        | 1             |
| 111D651   | FPM BALL V.DOUB.ACT.PNEUM.ACCT.SOLV.SOCK.OUT. 25 | 0,9175     | 0,02243                   | 1,4052       | 1             |
| 111D652   | FPM BALL V.DOUB.ACT.PNEUM.ACCT.SOLV.SOCK.OUT. 32 | 1,8404     | 0,00891                   | 2,0278       | 1             |
| 111D653   | FPM BALL V.DOUB.ACT.PNEUM.ACCT.SOLV.SOCK.OUT. 40 | 2,0896     | 0,00891                   | 2,277        | 1             |
| 111D654   | FPM BALL V.DOUB.ACT.PNEUM.ACCT.SOLV.SOCK.OUT. 50 | 2,4555     | 0,00891                   | 2,6429       | 1             |
| 111D655   | FPM BALL V.DOUB.ACT.PNEUM.ACCT.SOLV.SOCK.OUT. 63 | 2,792      | 0,01553                   | 3,1187       | 1             |
| 111D656   | V.B. BID.ACT.NEUM D/E S/ENC 75 FPM               | 6,0828     | 0,04460                   | 6,7768       | 1             |
| 111D657   | S/ACTING DNEUMATIC BIDIR. BALL V. PLAIN 90MM FPM | 7,59       | 0,04460                   | 8,284        | 1             |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es

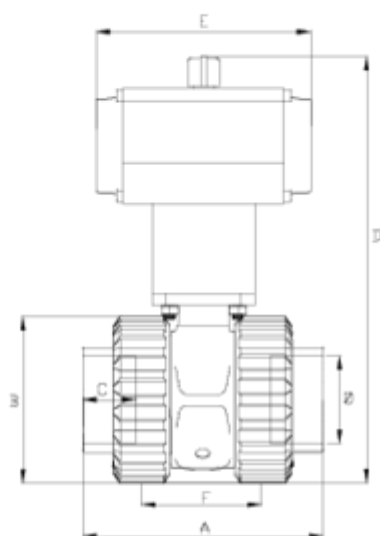

## ITEM 678 | Solvent socket outlet - double acting spring return actuator - FPM

| CÓDIGO | f  | Actuador | PESO (g) | DN | A   | B   | C  | D   | E   | F   | PN   | MEDIDA  |
|--------|----|----------|----------|----|-----|-----|----|-----|-----|-----|------|---------|
| 11D650 | 20 | H050DE   | 1278     | 15 | 86  | 55  | 16 | 192 | 138 | 44  | PN16 | MÉTRICO |
| 11D651 | 25 | H050DE   | 1323     | 20 | 94  | 62  | 19 | 197 | 138 | 49  | PN16 | MÉTRICO |
| 11D652 | 32 | H050DE   | 1474.4   | 25 | 122 | 72  | 23 | 209 | 138 | 66  | PN16 | MÉTRICO |
| 11D653 | 40 | H050DE   | 1745.6   | 32 | 131 | 88  | 25 | 232 | 138 | 71  | PN16 | MÉTRICO |
| 11D654 | 50 | H050DE   | 2038.4   | 40 | 150 | 103 | 31 | 249 | 138 | 75  | PN16 | MÉTRICO |
| 11D655 | 63 | H050DE   | 2561.6   | 50 | 177 | 120 | 38 | 291 | 138 | 89  | PN16 | MÉTRICO |
| 11D656 | 75 | H075DE   | 5550     | 65 | 216 | 150 | 45 | 375 | 210 | 119 | PN10 | MÉTRICO |
| 11D657 | 90 | H075DE   | 7130     | 80 | 257 | 181 | 51 | 402 | 210 | 140 | PN10 | MÉTRICO |





## Product Documents



## Product Certificates

## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es