




## Vannes à boisseau 'basic' bi-directionnelle

# Sortie taraudée moteur électrique 220V - PTFE

## ITEM 656

| RÉFÉRENCE | DESCRIPTION                                    | Poids net | Volume (m <sup>3</sup> ) | Poids brut | Unités par lot |
|-----------|------------------------------------------------|-----------|--------------------------|------------|----------------|
| 111D309   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 1/2"   | 2,6953    | 0,02243                  | 3,183      | 1              |
| 111D310   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 3/4"   | 1,2755    | 0,02243                  | 1,7632     | 1              |
| 111D311   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 1"     | 1,5326    | 0,00891                  | 1,72       | 1              |
| 111D312   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 1 1/4" | 1,6868    | 0,03129                  | 2,2598     | 1              |
| 111D313   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 1 1/2" | 3,2753    | 0,01553                  | 3,602      | 1              |
| 111D314   | VAN. Á BOISSEAU AV. MOT.220V S/TARAUDÉE 2"     | 4,018     | 0,02243                  | 4,5057     | 1              |
| 111D315   | V.BOLA BIDIREC. ACT.ELEC.R/H 2 1/2"            | 4,61      | 0,03648                  | 5,204      | 1              |
| 111D316   | V.BOLA BIDIREC. ACT.ELEC.R/H 3"                | 6,76      | 0,04460                  | 7,454      | 1              |



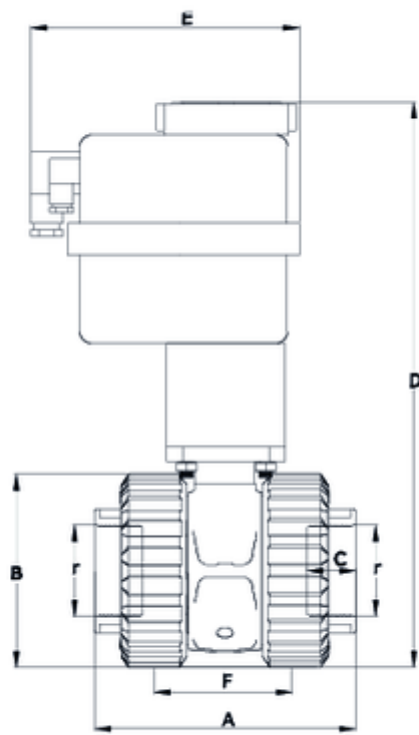

## ITEM 656 | Sortie taraudée moteur électrique 220V - PTFE

| CÓDIGO | r      | Actuador | PESO (g) | DN | A   | B   | C  | D   | E   | F   | PN   | TIPO ROSCA |
|--------|--------|----------|----------|----|-----|-----|----|-----|-----|-----|------|------------|
| 11D309 | 1/2"   | H10      | 1080     | 15 | 86  | 55  | 17 | 227 | 177 | 44  | PN16 | BSP        |
| 11D310 | 3/4"   | H10      | 1124.2   | 20 | 99  | 62  | 20 | 232 | 177 | 49  | PN16 | BSP        |
| 11D311 | 1"     | H10      | 1261.1   | 25 | 122 | 72  | 23 | 243 | 177 | 66  | PN16 | BSP        |
| 11D312 | 1 1/4" | H20      | 2119.85  | 32 | 131 | 88  | 26 | 265 | 177 | 71  | PN16 | BSP        |
| 11D313 | 1 1/2" | H20      | 2398.24  | 40 | 155 | 103 | 33 | 282 | 177 | 75  | PN16 | BSP        |
| 11D314 | 2"     | H20      | 2952     | 50 | 180 | 120 | 29 | 390 | 177 | 89  | PN16 | BSP        |
| 11D315 | 2 1/2" | H35      | 4610     | 65 | 202 | 150 | 33 | 401 | 177 | 119 | PN10 | BSP        |
| 11D316 | 3"     | H55      | 6760     | 80 | 232 | 181 | 36 | 450 | 177 | 140 | PN10 | BSP        |





## Documentation Produit



## Certifications de produits

## Certificats d'entreprise



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Service d'Attention  
Technique Commerciale  
+34 966 105 888



www.hidroten.es